#### SMART CAMERA

## NEW SMART HOME SERIES



Safeguard your home and store







### **Brand Concept**


LEXA's smart home products, simple and human-oriented, are far above others, with many patents fully showing their complete functions and durability. The brand spirit and personality element make LEXA a top brand in the international industry. Every series has its soul and personality and realizes an elegant fusion of home space. Considering people's feelings and needs, LEXA keeps trying to make things simpler with unique design, perfect technique, top materials, and sophisticated construction. And every product is perfection from every angle, even in the smallest details. Defection or compromise is not allowed in LEXA, even inside or out of sight. We are not only bringing the best products to the whole world but also making LEXA one of the LEXA global manufacturers.

LEXA is on behalf of noble taste and leads the world in the development of control equipment. Sticking to the business philosophy of simplicity, originality, personality, and humanity, LEXA provides perfect solutions with superb technology, unique design, and verified products, and integrates diverse control in smart home blueprints.









Amazo

Google Assistant

Smart Life

- 6-inch HD LCD, IPS, multi touch screen, quadruple microphone with noise reduction, Auto light sensor, built in 1W speaker.
- ZigBee gateway function, APP remote control.
- Control the lights, curtains, air conditioners, and all other Smart Home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen.



MCPO3-6\*Type Grey





MCPO1-86Type



MCPO2-118Type


LEXA

### **Touch Panel**



item				
Standard	EU FR 100-250V			
Max . Voltage				
Wireless consumption	≤0.2W			
Max . Current	16A			
	Panel :	Glass touch panel		
	Bcak :	Flame retardant PC + 1.5mm steel iron frames		
Marterial	Inside :	Phosphor copper		
	Touch Point :	silver alloy		
Color	Gold White Black Gray			
Size	86*86*35mm			













### Thermostat


### **MEMORY PROTECTION**





МНТООО6

МНТ0003



White

Black







### M8000C



### **EFFICENT CUSTOMIZATION ONE-STOP PROCUREMENT**

Temperature controller manufacturer





MEMORY





White







188



Grey

Black





### **MBH7000**











Satin Silver

Master Control

Satin Silver



Satin Gold



Satin Black

Smart Life

Tuva

Amazor

Google Assistant

**SMART KNOB THERMOSTAT** 





### **Smart Module Switch**

Remote Control Voice Control Set Schedule Electricity Monitoring







M-1CH

1 Way Switch



M-2 CH

2 Way Switch



M-3 CH 3Way Switch



**M-4 CH** 4 Way Switch

1CH Wi-Fi Denmer Module Volage : AC100-2KOV Stretcher

M-1 DM

1 Way Dimmer

LED (ACOM



M-1 CM 1 Way Curtain Switch

2CH Wi-Fi Dimmer Module



M-2 CM 2 Way Curtain Switch



**M-2 DM** 2 Way Dimmer



### **Smart Module Switch**

Remote Control Voice Control Set Schedule Electricity Monitoring

zigbee



MZ-2 CH

2 Way Switch

CHI Zighoo Dirower Moduli

MZ-1 DM

1 Way Dimmer

2CH Zigbee Cuitain M



MZ-3 CH 3Way Switch

Model MZ/Zigbee



MZ-2 DM 2 Way Dimmer





CH Zinhie Saturi h





MZ-1 CM 1 Way Curtain



MZ-1 CH-L 1 Way Switch Single Live



2 Way Switch Single Live

MZ-2 CM

2 Way Curtain

MZ-3 CH-L 3Way Switch Single Live















MLED-B12



MLCD-B2



**Intelligent Device Control Center Remote Control/Custom Ringtone Connection To Other Smart Devices** 

### **Smart Gateway**



Smart Zigbee Wireless Gateway

Smart Zigbee LAN Gateway

MZG01 **Product Specifications** 

Appearance size: 61 x 61 x 15mm Weight: Net Weight 33g Status indicator: 1Power indicator,1 Network indicator Operation buttons: 1 button (reset) Adapter: 110V-240VAC, 5V/1ADC Working Voltage: 1.8V~3.3V Working temperature: -10-55°C Working humidity: 10%-90% RH (Non-condensing) Storage temperature: -20-60°C Storage humidity: 5%-90% RH (Non-condensing) IEEE 802.15.4 2.4-2.485Ghz Ziabee 3.0





#### Smart Multi-Mode Gateway

### MZG03

**Product Specifications** 

Appearance size: 60 x 60 x 15mm

Weight: Net Weight 32g Status indicator: 2 LED (Wi-Fi/Zigbee/Bluetooth) Operation buttons: 1 button (reset) Power supply: Micro USB DC5V Working Current: <1A Adapter: 110V-240VAC, 5V/1ADC Working Voltage: 1.8V~3.3V Working temperature: -10-55°C Working humidity: 10%-90% RH (Non-condensing) Storage temperature: -20-60°C Storage humidity: 5%-90% RH (Non-condensing) Hardware interface: 1 Micro USB Wirreless technology IEEE 802.15.4 2.4-2.485Ghz Zigbee 3.0/BLE5.0

### MZG02


#### **Product Specifications**

Appearance size: 92 x 92 x 25.5mm Weight: Net Weight 100g Status indicator: 4 LED (Green) Operation buttons: 2 button (reset) Power supply: Micro USB DC5V Working Current: <1A Adapter: 110V-240VAC, 5V/1ADC Working Voltage: 1.8V~3.3V Working temperature: -10-55°C Working humidity: 10%-90% RH (Non-condensing) Storage temperature: -20-60°C Storage humidity: 5%-90% RH (Non-condensing) Hardware interface: Micro USB, 1 LAN Interface Wirreless technology IEEE 802.15.4 2.4-2.485Ghz Zigbee 3.0


#### Someone passed, get mobile notification

Arm the detector, the sensor detects that someone has passed send the alarm alert to your mobile in real time





switch, it automatically lights up when people pass, convenient and saves electricty





#### Real-time monitoring with smart camera

After detecting someone passing, the camera 360° real-time video can watch the monitoring screen in real time through the mobile APP



**High-decibel** 

audio alarm

The high-decibel alarm scares

off the intruder





### WiFi Temperature & Humidity

MV08360A



**Smart Sensor** 

MV08360B



MV08360C

Size: 65 x 65 x 17mm Micro Input: DC 5V/1A LED Indicator: Blue Wi-Fi Protocol: 2.4GHz Wi-Fi Standard: IEEE802.11 Bb/g/n Temperature measure range: 0°C-60°C Temperature Accuracy: ±1°C

### Sesor with LCD Screen



"|[]:23

85/60/1 505



Google Assistant

#### Wi-Fi IR Remote Control Sensor

- \* 360° Full Range Coverage
- \* Mobile Phone Remote Control
- \* Support Smart Voice Speaker
- \* Support Timer Function
- \* Smart Learn Function & DIY



MV08533 WiFi/Zigbee

### **Zigbee IR Remote Control Sensor**

- \* Material: ABS
- \* Micro Input: DC 5V/1A
- \* Standby Current: ≤ 15mA
- \* Infrared Frequency: 38 KHz
- \* Infrared Transmission Current: ≤ 110mA
- \* Infrared Range: < 12 meters
- \* Wi-Fi frequency: 2.4GHz IEEE 802.11 b/g/n
- \* Zigbee frequency: IEEE 802.15.4
- \* Support third-party Voice Control: Amazon alexa, Google Assistant





Smart Life

Tuva

Amazor

MV08062 WiFi/Zigbee





### **Smart Sensor**





#### Wi-Fi Door Window Sensor MV08362

Battery: LR03-1.5V/AAA 2 (Alkaline battery) Battery Life: 6000 times trigger Standby Current: 8uA Alarm Current: 70mA 120mA Wireless Type: 2.4GHz Wireless Standard: IEEE 802.11b/g/n Working Temperature: 0°C-40°C (32°F ~104°F) Working Humidity: 20%-85% RH Storage Temperature: 0°C~60°C (32°F ~140°F )



#### Wi-Fi Door Window Sensor MV09265

Input voltage: DC3V LR03 x 2 Standby current: <10uA Alarming current: ≤15mA Low-voltage notification: <2.5V Zigbee frequency: 2.400GHz-2.484GHz Magnetic control distant: ≥15mm Working temperature: -10-50°C



WiFi

### **Smart Sensor**



Smart Life

Tuva

Amazon

Google Assistant

#### Smart Water Sensor MV08735

Battery: LR03-1.5V/AAA\*2 (Alkaline battery) Battery Life: 6000 times trigger Standby Current: 8uA Alarm Current: 70mA ~ 120mA Wireless Type: 2.4GHz Wireless Standard: IEEE 802.11b/g/n Working Temperature: 0°C~40°C (32°F ~104°F) Working Humidity: 20%-85% RH Storage Temperature: 0°C~60°C (32°F ~140°F) Storage Humidity: 0%~90% RH App: Tuya smart or Smart life Supports Android 4.4 and iOS 8.0 or newer Size: Sensor: 71mm x 25mm x 20 mm Sensor Cable: 1m Material: ABS Patent No.: 201930649295.9



#### Water-Level Alarm Industry definition of elivisity barriers, industry agent of elivisity barriers in the state of elivisity barriers agent in the state of elivisity of elivisity barriers in the state of elivisity of elivisity of elivisity in the state of elivisity of elivisity of elivisity of elivisity in the state of elivisity of elivisity of elivisity of elivisity in the state of elivisity of elivisity of elivisity of elivisity of elivisity in the state of elivisity of elivisity

Pipe Water Leakage Alarm



#### **PIR Motion Sensor**





#### MV08361

Wi-Fi Connection / High accuracy/ Large detection range Size: 70 x 45 x 35.6mm Battery: LR6-1.5V/AA\*2(Alkaline battery) Micro Input: DC 5V/1A Detect Angle: 128° Detect Distance: <8m WiFi Type: 2.4GHz WiFi Standard: IEEE 802.11 b/g/n Working Temperature: 0°C-50C Working Humidity: 10%-85% RH App: Tuya Smart or Smart Life Support Android 4.4+oriOS 8.0+ version Includes Micro charging cable, adhesive tape and screws

#### Different features to meet your imagination





### **Smart Sensor**





#### Zigbee Combustible Gas Sensor



#### MV09270

- $\boldsymbol{\cdot}$  When detected gas leakage will alarming
- and send out signal to gateway.
- Working Voltage: AC85V-250V
- Average Consumption: <1.5W
- Alarm Sound: 70db (1meter)
- Alarm Density: 7% LEL±3% LEL (CH4)
- Zigbee standard IEEE802.15.4
- Zigbee working frequency: 2.400GHz-2.484GHz

#### **Zigbee PIR Motion Sensor**



#### MV09266

- USB Input voltage: DC5V/2A
- Battery Input voltage: DC3V Lr03
- Static Current: ≤35uA
- Working current: ≤15mA
- Low-voltage notification:  $\leq$ 2.4V
- Zigbee operating frequency: 2.400GHz-2.484GHz
- Detecting Distance: 6M
- Detecting Angle: 360° Ceiling Mounted
- Working Temperature: -10~+50°C

US





EU



### **Smart Sensor**



٣

ziqbee

Smart Life

#### Zigbee Water Leakage Detector



#### MV09271

- When detected water leakage will send out signal to gateway
- Input Voltage: DC3V CR123A
- Standby Current: ≤10uA
- Alarm Current: <75mA
- Low-voltage: 2.5V
- vZigbee working frequency: 2.400GHz-2.484GHz
- Detection method: Water detection
- Working Temperature: -10- +50°C
- Working Humidity: 95% RH

#### **Zigbee Smoke Detector**



#### MV09269

- When detected smoke leakage will alarming and send outsignal to gateway
- Input voltage: DC3V Lr03
- Quiescent current: <35uA
- Working current: ≤100mA
- Low voltage and under-voltage: <2.4V
- Alarm sound pressure: 85db/1m
- Zigbee standard: IEEE802.15.4
- Working frequency: 2.405~2.480GHZ
- Detection range: 20m<sup>2</sup>







#### Zigbee Temperature Humidity Sensor



MV09268

### **Smart Sensor**



Product parameter: DC3V Lr03

- Quiescent current: ≤10uA
- Alarm current: ≤15mA
- Low voltage and undervoltage: ≤2.6V
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature: -10°C~+60°C
- Detection humidity: 0-100%RH
- Working temperature: -10-50°C
- Working humidity: maximum 95%RH





- Product parameter: DC3V Cr2450
- Quiescent current: <10uA
- Alarm current: ≤15mA
- Low voltage and undervoltage: <2.6V
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature: -10°C ~ +60°C
- Detection humidity: 0-100% RH
- Working temperature: -10-50°C



### **Smart Sensor**



#### **Zigbee Human Motion Sensor**



#### MV08229

- Detection distance : 7-10M
- Detection angle: Wide angle 120°
- Battery: 3V Cr2450
- Operating Temperature: -10°C-55°C
- Working humidity: 10%-90% RH (Non-condensing)
- Main function: Intelligent linkage
- Wireless Standard: WIFI802.11b/g/n Zigbee802.15.4
- Housing material : ABS



#### Wi-Fi Combustible Gas Sensor

- Input voltage: AC 85V-250V
- WiFi Standard: 802.11b/g/n
- Alarm concentration: 6% LEL± 3% LEL (CH4)
- Alarm Sound: 70dB/m
- Average Consumption: ≤1.5W
- Working Temperature: -10°C +50°C
- Working Humidity: <95%RH
- Product Size: 55 x 48 x 30mm



#### **Wi-Fi Smoke Detector**

- Power supply: DC9V alkaline battery (6LR61)
- Static current: <10uA
- Alarm current: <100mA
- Working temperature: 0°C +50°C
- Humidity: 95% RH, no freezing
- Alarm sound: >80dB
- Low battery alert: 7.0V+0.2V



# **IP65** Waterproof Level

YP2



#### **Smart Wireless Camera**





#### Features

- H.265 compression format, real-time monitoring and high-definition
- Dual Light PCB designed, Two way Audio, Full color night Vision
- 3.0MP real-time image transmission, adaptive network,
- smooth experience
- up to 25 frames per second
- Echo cancellation and noise suppression technology, perfect full-duplex voice effect
- With Amazon cloud penetration technology, one-key remote, plug and play



MTYD6



-MOBILE TRACKING-

Intelligent recognition of the human body, detect the dynamic lens automatic tracking





#### **Smart HD Camera**

Multiple Storage Methods

### MSHDC-02

### **1080P PTZ Smart WiFi Camera**

1080P HD Quality



#### Features

- 1080P PTZ smart camera
- Support WIFI function, 2dB antenna
- Two-way voice intercom function
- Excellent Adaptive Night Vision Automatic Function
- 15m infrared night vision, low light environment, details are clearly visible
- · 360 full viewing angle, pan/tilt function, horizontal 355, vertical 100" flexible rotation
- Support automatic/alarm/timed recording
- Humanoid automatic tracking function
- · Support multi-terminal real-time viewing
- Support online operations on major platforms, support

ш 1. TF card storage Supports up to 128GB TF card Gį









HD

2MP HD Quality

Remote View

-

Wireless WiFi

影

Motion Detection

5

IP66 Waterproof

Ð

Cloud Storage SD Card Storage

0

¢

2

Smart IR





#### HD Quality

### 1080P PTZ Smart WiFi Camera

1080P HD Quality



#### Smart HD Camera

### MSHDC-04





#### Description

- Two-way intercom wireless intelligent connection 360-degree HD monitoring
- Motion detection, intelligent alarm \*Professional infrared filling lamp system
- Support 2 million night vision lenses, 2 million high resolution images, fine texture
- Focal length 3.6mm, daytime visible range of 30m, night vision range of 20m
- Intelligent qos algorithm automatically adjusts bit stream and frame rate, adaptive network, bringing perfect video experience
- Support tf card storage, the maximum memory expansion to 128G, can be played at any time, video editing







Microphone



DCSV Power Connector







**HD Quality** 

#### **Smart HD Camera**

### MSHDC-04



#### Features


- Simple installation, E27 lamp holder can work
- 360 degree panoramic picture, the picture can change the angle arbitrarily
- Million pixels, H.265 compressed format
- Duplex call, humanoid trigger alarm
- Support 4x digital zoom



#### MTYP5V

#### Features

- Simple installation, E27 lamp holder can work
- 360 degree panoramic picture, the picture can change the angle arbitrarily:
- Million pixels, H.264 compressed format
- Duplex call, humanoid trigger alarm
- Support 4x digital zoom

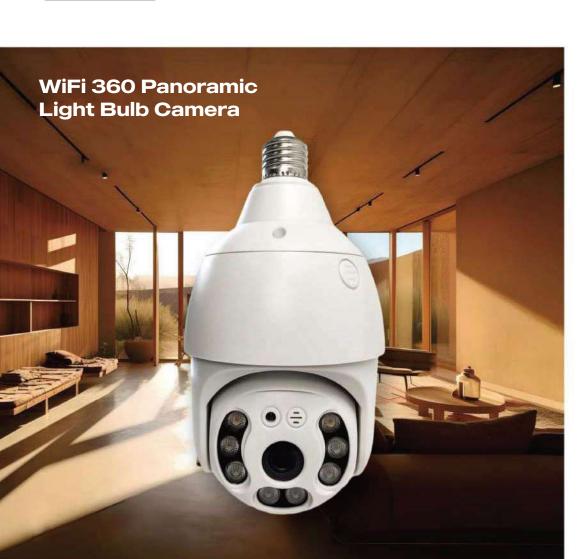



#### **Smart HD Camera**



Smart Life

Tuva

Amazor

Google Assistant

#### MTYP5D

Features

- 1920X1080P
- H.265 compressed format Support 16x digital zoom
- 10 meter visual range
- 355 degree panoramic picture
- Size:115x68.5mm



#### MTYS2-k01

- Features
- 1920X1080P
- H.264 compressed format
- 5meter visual range
- 100 degree panoramic picture

#### MTYB08

#### Features

- 2.0MP WIFI camera
- Support WIFI function, 2dB antenna
- Two-way voice intercom function
- Excellent adaptive night vision automatic function (Support manual adjustment)
- 20m infrared night vision, low light environment, details are clearly visible
- Support automatic/alarm/timed recording
- Support multi-terminal real-time viewing Support online operations on major platforms. support screen drag, rotate and other operations
- Support TF card slot (TF card not included)
- Size: 150 x 155 x 115mm



#### MSZ01

- Features
- 1920X1080P(200W)
- Audio Output: 2W Speaker
- 10 meter visual range
- Wireless: IEE802. 11. b/g/n
- Size: 120X40X140mm









### • Solar panel universal adjustment, built-in super capacity battery

- Ultra-low power standby, quick wake up in 0.2 seconds
- PIR sensor + radar dual alarm detection
- High-performance ISP and 1/2.7 progressive sensor, blacklight full color
- 1920x1080P HD video
- Built-in microphone and loudspeaker, support two
  way audio
- Support Cloud storage and local storage
- APP support Android/IOS
- IP65 waterproof
- Support All-in-One installation and separated installation



#### MTPP6

- Full HD 1080p Battery Powered Security Camera with PIR Sensor (with Solar Panel for Continuous Power Charging Outdoor)
- The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- T21Z Chipset, More functions and lower power consumption
- Infrared night vision, guarding family safety 24 hours a day
- Intelligent motion detection, abnormal situation is pushed to mobile phone within 1 second
- 2pcs 18650 rechargeable batteries, standby for up to 6 months
- 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- · LinUX operating system, start faster, run more stable
- · Wi-Fi/AP connection, no wiring required
- HD 2.0MP image sensors for recording clear dynamics
- $\boldsymbol{\cdot}$  Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- Support iOS and Android systems




#### **MIPC216**

- IP66
- 1080p Wifi Waterproof Bullet Solar Panel
- Charging Metal Camera
- Real Time Message Push
- Rechargeable Solar Panel With 4pcs 18650 Batteries
- Standby 4-6 Months
- 6W Solar Board




#### MSZ01

- HD 2 million pixel CMOS image sensor, which has good low illumination effect and high image definition.
- Support 2.0MP (1920x1080P) HD resolution.
- Support IR-CUT day and night switching, support day and night full color, APP free switching.
- Support phone wake-up and PIR wake-up.
- · Support two-way voice intercom.
- Support SD card storage, cloud storage, video query playback.
- Support device sharing.
- · Its own intelligent detection algorithm effectively reduces false alarms.
- The device configuration can be realized in only 2 steps.
- The fastest time to wake up to see the image can be within
- 3 seconds, and the message will be pushed within 1 second.

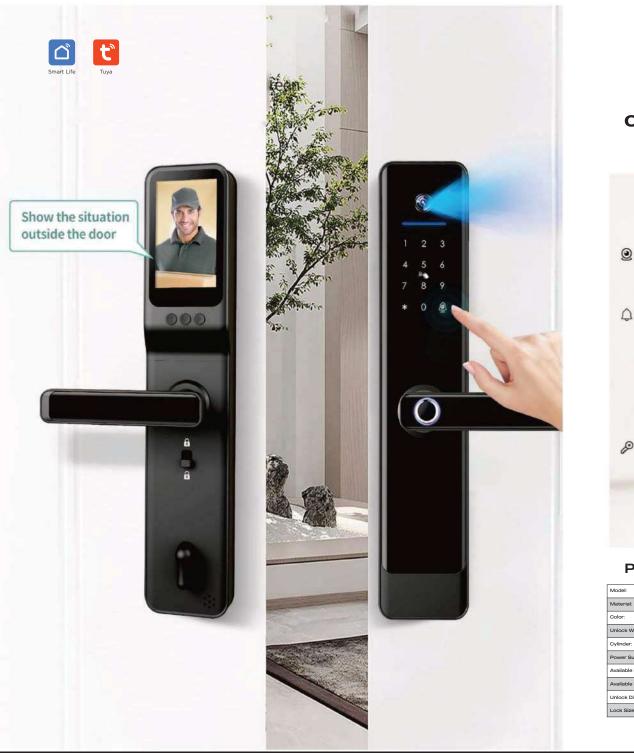

#### LEXA **Camera Smart Lock ME-098** CAMERA SMART LOCK Fingerprint $\bigcirc$ Unlock Infrared camera \$ (A) Indicator Hd electronic eye light Card Unlock **Doorbell function** Door bell rings, inside owner can check outside visitors by camera Password 0 Unlock APP 0 Key unlock and power charge — for any emergency use Unlock The cylinder will unlock the lock mortise directly. If it is power failure problem, use the emergency power recharge port to start the lock again. Key Unlock **PRODUCT PARAMETERS**

Model:	E908
Material:	Curved tempered glass aluminum alloy
Color:	Black
Unlock Way:	Fingerprint/Password/card//APP/key
Cylinder:	C Level
Power Supply:	8 AA batteries
Available Door:	Wood door/Security door/Bronze door/iron door
Available Thickness:	40мм-80мм
Unlock Direction:	Universal for left/right
Lock Size/with rubber:	370x75mm/373x78mm







### М-НҮОЗ




#### Features

- Front Panel Size: 420mm x 76mm x 65mm
- Rear Panel Size: 420mm x 76mm x 65mm
- Suitable Door Thickness: 40-120mm
- Material: Carbon Steel+aluminum Alloy
- Process: Electric Spray
- Painting Color: Matte Black
- Key Type: Capacitive Touch Screen
- Key Material: Tempered Glass



LEXA





Quick access with fingerprint with low false recognization rate, good for old man or kids

**S1** 

#### Keyless Smart Cylinder

No breaking the door or change the door body

### MSL-S1



#### PRODUCT PARAMETERS

Reader Dimension:	42x42mm
Power Source:	1 x CR123A(Akaline)
Material:	Aluminum Alloy/Brass
Installation:	Intermediate, Tools required(Included)
Unlock Way:	App Fingerprint, Keycard Manual key
IP Class:	IP54 (Dust and Splash Proof)
Emergency Power:	1x Micro Type-C charging port
Door Thickness:	35-45mm












### M-H168









Model	:	H28	Material	:	Aluminum Alloy + PC + Acrylic
Color	:	Black	Unlock Way	:	Fingerprint / App / Password
Cylinder	:	C Level	Power Supply	;	4 pcs AAA batteries
Fingerprint Capacity	:	50	Passcode	:	No limit cyclic
Available Door		Wood / Steel	Available Thickness		30mm-55mm
Unlock Direction	:	Universal for left/right	Emergency Power	:	Micro USB
Product Dimensions	:	147×72×17mm			









### MSLD-01



Materials	:	High Density Aluminium Alloy
Surface Treatment	:	Anodization
Fingerprint Reader	:	Living Fingerprint Recognition, 0.5 second Speed Recognition
Administrator Capacity	:	100 pcs
User Capacity	:	100 pcs
Fingerprint Capacity	:	100 pcs
Password Capacity	:	20 pcs
IC Card Capacity	:	50 pcs
Bluetooth	:	Tuya App / Smart Life
Fingerprint Resolution	:	500 DPI
False Accept Rate (FAR)	:	< 0.001%
False Rejection Rate (FRR)	:	< 0.1%
Power Supply	:	4 pcs AA Battery
Working Relative Humidity	:	20% RH - 90% RH
Door Thickness	:	35mm – 65mm
Lock Body	:	Single-latch, and suitable for the lock body which's backset is bigger than 45mm



MSLD-01BR Bronze



MSLD-01E	
Black	



MSLD-01G Gold





ß

5

420

M410










### **Remote Control**

Turn on your water heater in advance, enjoy a lot shower when arrived



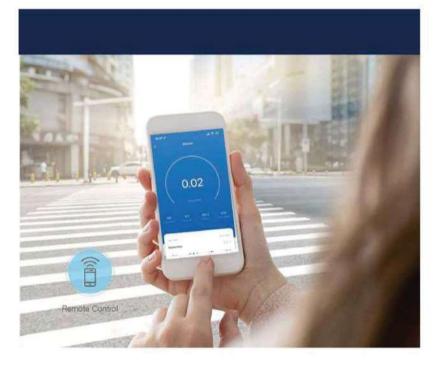

### Smart Lock



### M410

American Type Max Power : 2200W Smart Socket

Fire Retardant PC

- This socket is a 10A wifi smart socket, using the Tuya smart solution.
- Support smart audio voice control such as Tmall Genie.
- Mobile phone time delay switch.
- Real-time feedback of status.keep aneye on the status of the socket at home at any time.
- The whole house intelligent equipment scene linkage,automatically execute the scene mode.
- $\boldsymbol{\cdot}$  The whole family shares the equipment, multiple users can view at the same time.
- Can be used for electrical appliances with power below 2200W.
- Imported fire retardant materials, safe and reliable.







# Smart Plug









European Type

Smart Socket

#### Fire Retardant PC

- This socket is a 16 A wifi smart socket, using the Tuya smart solution.
- Support smart audio voice control such as Tmall Genie.
- Mobile phone time delay switch.
- Real-time feedback of status, keep aneye on the status of the socket at home at any time.
- The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- $\cdot$  The whole family shares the equipment, multiple users can view at the same time.
- Can be used for electrical appliances with power below 2200W.
- Imported fire retardant materials,safe and reliable.





----





#### K03-16A

Input Voltage : AC100-240V 50/60Hz Maximum currrent : 16A WoFo standard : 2.4gHz 802.11b/g/n Surge protect : 140J



Al Quoz IND - 1, SZR - Interchange No 3 - Dubai info@lexalifestyle.com | +971 55 576 2130